


Flowmeter with float, DFM 165

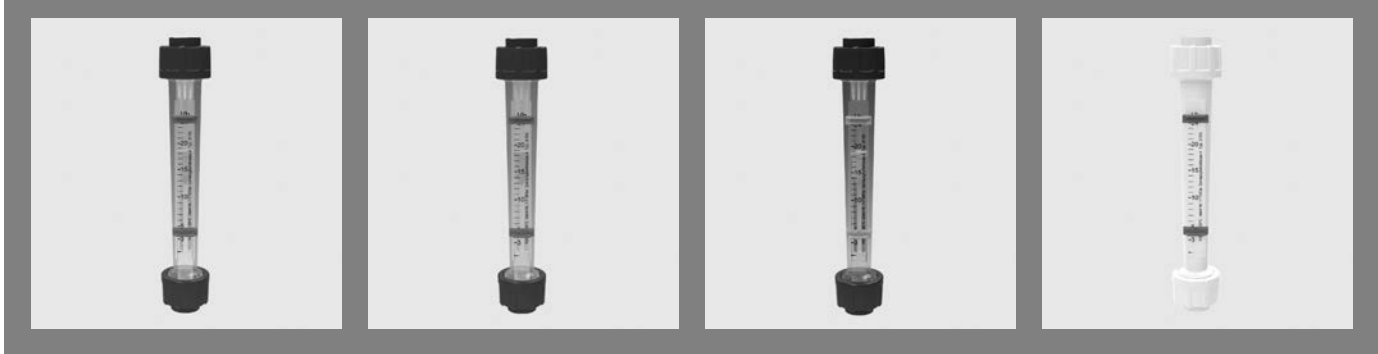

Measuring Range


- 3 - 250 l/h

body PVC-U						
size pressure range	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
Connection	sealing	ident No.				
PVC-U socket end DIN ISO	EPDM		47500 0.08 kg	47501 0.08 kg	47502 0.08 kg	47503 0.08 kg

body PVC-U float magnet						
size pressure range	float		magnet	magnet	magnet	magnet
	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
measuring range(l/h)		3-24	5-60	10-100	25-250	
Connection	sealing	ident No.				
PVC-U socket end DIN ISO	EPDM		47683 0.08 kg	47684 0.08 kg	47685 0.08 kg	47686 0.08 kg

body PA						
size pressure range	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
Connection	sealing	ident No.				
PVC-U socket end DIN ISO	EPDM		47516 0.08 kg	47517 0.08 kg	47518 0.08 kg	47519 0.08 kg

Flowmeter with float, DFM 165

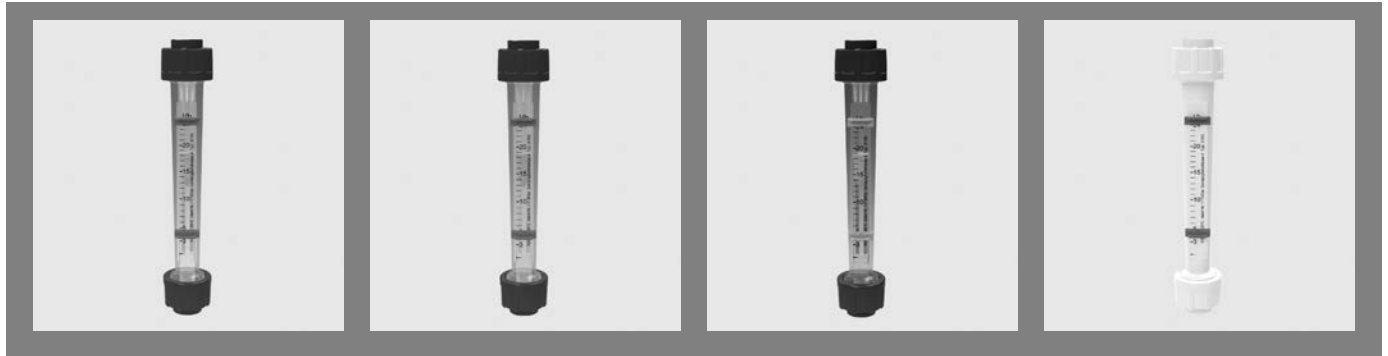


body PA		float magnet				
<i>size</i>	float		magnet	magnet	magnet	magnet
<i>pressure range</i>	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47699 0.08 kg	47700 0.08 kg	47701 0.08 kg	47702 0.08 kg

body PSU						
<i>size</i>	d(mm)		16	16	16	16
<i>pressure range</i>	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47532 0.08 kg	47533 0.08 kg	47534 0.08 kg	47535 0.08 kg

body PSU		float magnet				
<i>size</i>	float		magnet	magnet	magnet	magnet
<i>pressure range</i>	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47715 0.08 kg	47716 0.08 kg	47717 0.08 kg	47718 0.08 kg

Flowmeter with float, DFM 165

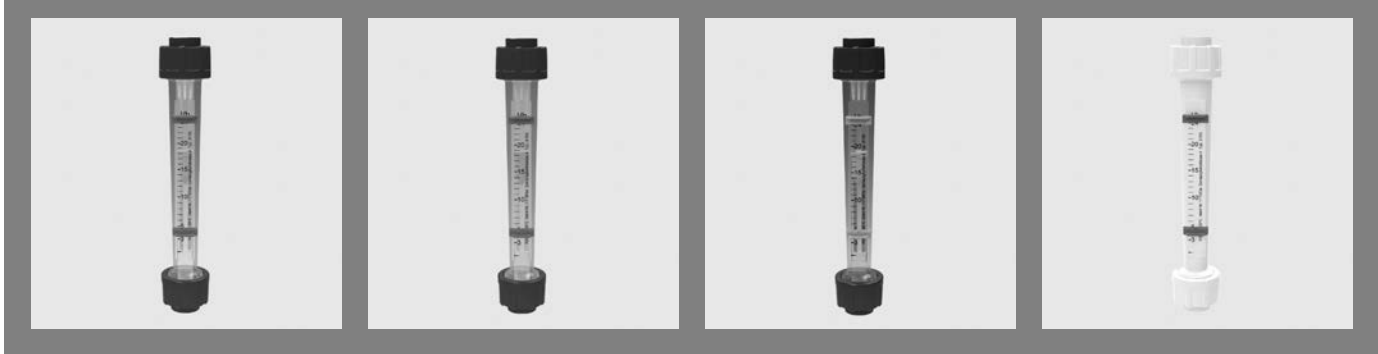

body PVDF


<i>size</i> <i>pressure range</i>	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
	measuring range(l/h)		3-24	5-60	10-100	25-250
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
	PVDF socket end DIN ISO	FPM	141960 <i>0.11 kg</i>	141961 <i>0.11 kg</i>	141962 <i>0.11 kg</i>	141963 <i>0.11 kg</i>

body PVDF

float magnet

<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		16	16	16	16
	DN(mm)		10	10	10	10
	DN(inch)		3/8	3/8	3/8	3/8
	G(inch)		3/4	3/4	3/4	3/4
measuring range(l/h)		3-24	5-60	10-100	25-250	
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
	PVDF socket end DIN ISO	FPM	141964 <i>0.11 kg</i>	141965 <i>0.11 kg</i>	141966 <i>0.11 kg</i>	141967 <i>0.11 kg</i>

Flowmeter with float, DFM 165

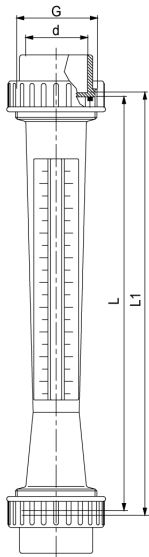

dimensions

d(mm)	16
DN(mm)	10
DN(inch)	3/8
PN(bar)	10
dimensions(mm)	
d	16
G	3/4
L	165
L1	171