


## Flowmeter with float, DFM 170

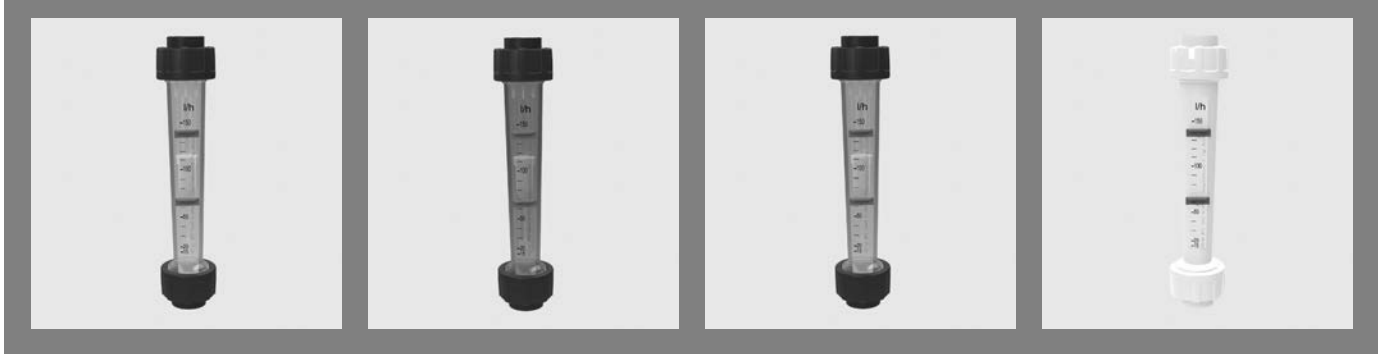

### Measuring Range


- 5 - 400 l/h

body PVC-U						
size pressure range	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
	measuring range(l/h)		5-50	15-150	25-250	40-400
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47504 0.10 kg	47505 0.10 kg	47506 0.10 kg	47507 0.10 kg

body PVC-U float magnet						
size pressure range	float		magnet	magnet	magnet	magnet
	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
measuring range(l/h)		5-50	15-150	25-250	40-400	
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47687 0.10 kg	47688 0.10 kg	47689 0.10 kg	47690 0.10 kg

body PA						
size pressure range	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
	measuring range(l/h)		5-50	15-150	25-250	40-400
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47520 0.10 kg	47521 0.10 kg	47522 0.10 kg	47523 0.10 kg

## Flowmeter with float, DFM 170

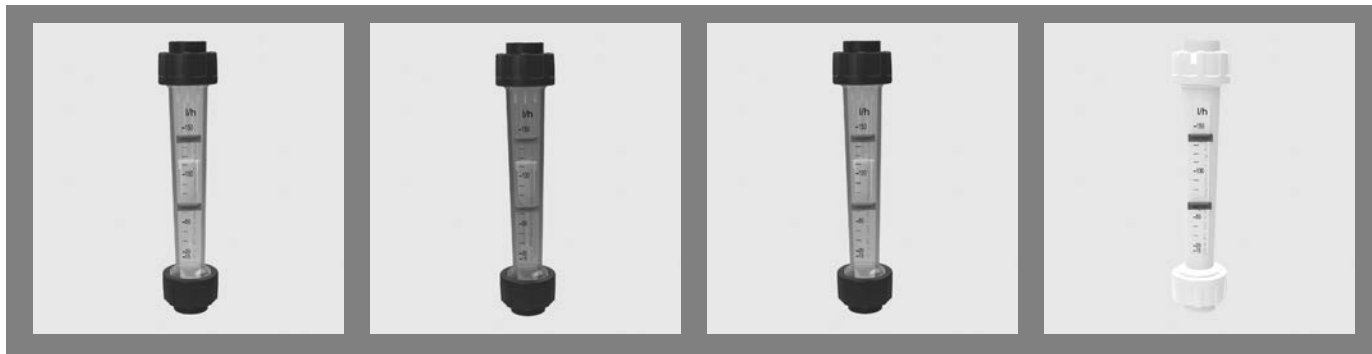


<b>body PA</b>		<b>float magnet</b>				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
	measuring range(l/h)		5-50	15-150	25-250	40-400
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47703 0.10 kg	47704 0.10 kg	47705 0.10 kg	47706 0.10 kg

<b>body PSU</b>						
<i>size</i> <i>pressure range</i>	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
		measuring range(l/h)		5-50	15-150	25-250
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47536 0.10 kg	47537 0.10 kg	47538 0.10 kg	47539 0.10 kg

<b>body PSU</b>		<b>float magnet</b>				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
	measuring range(l/h)		5-50	15-150	25-250	40-400
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47719 0.10 kg	47720 0.10 kg	47721 0.10 kg	47722 0.10 kg

## Flowmeter with float, DFM 170

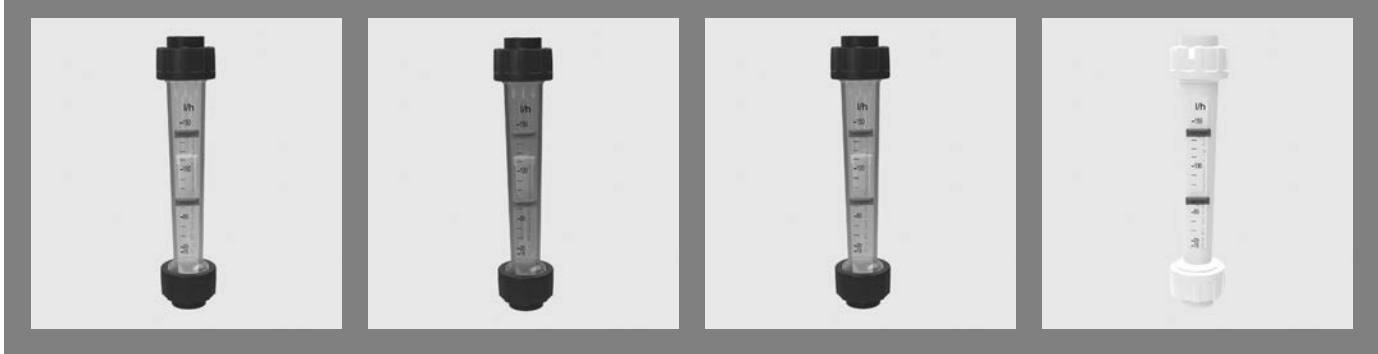

### body PVDF


<i>size</i> <i>pressure range</i>	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
	measuring range(l/h)		5-50	15-150	25-250	40-400
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVDF socket end DIN ISO	FPM <i>weight</i>		141968 <i>0.14 kg</i>	141969 <i>0.14 kg</i>	141970 <i>0.14 kg</i>	141971 <i>0.14 kg</i>

### body PVDF

#### float magnet

<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		20	20	20	20
	DN(mm)		15	15	15	15
	DN(inch)		1/2	1/2	1/2	1/2
	G(inch)		1	1	1	1
measuring range(l/h)		5-50	15-150	25-250	40-400	
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVDF socket end DIN ISO	FPM <i>weight</i>		141972 <i>0.14 kg</i>	141973 <i>0.14 kg</i>	141974 <i>0.14 kg</i>	141975 <i>0.14 kg</i>

## Flowmeter with float, DFM 170

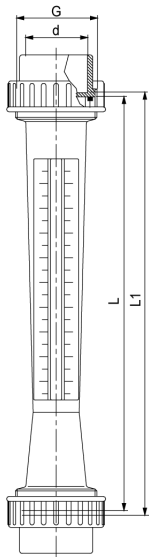

### dimensions

d(mm)	20
DN(mm)	15
DN(inch)	1/2
PN(bar)	10
dimensions(mm)	
d	20
G	1
L	170
L1	176