


Flowmeter with float, DFM 185

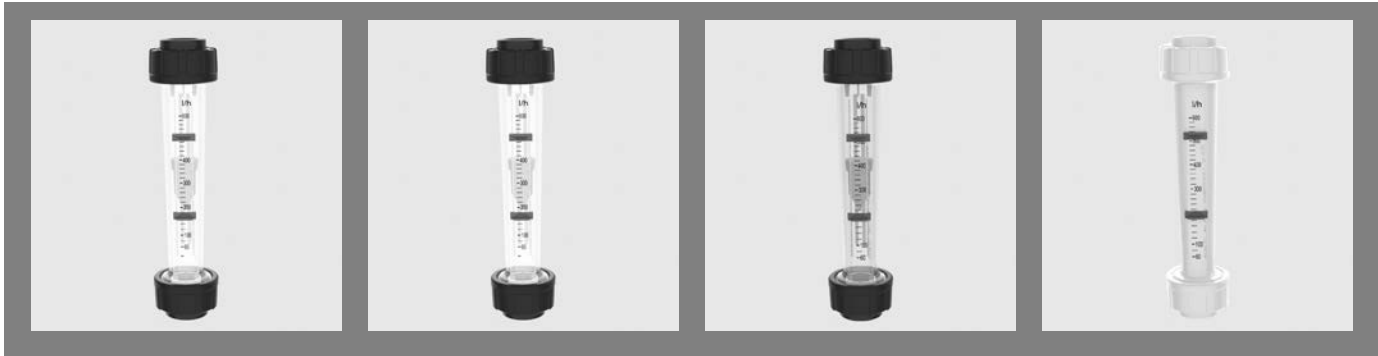

Measuring Range


- 15 - 1,000 l/h

body PVC-U						
size pressure range	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47508 0.13 kg	47509 0.13 kg	47510 0.13 kg	47511 0.13 kg

body PVC-U float magnet						
size pressure range	float		magnet	magnet	magnet	magnet
	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
measuring range(l/h)		15-150	40-400	60-600	100-1,000	
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47691 0.13 kg	47692 0.13 kg	47693 0.13 kg	47694 0.13 kg

body PA						
size pressure range	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47524 0.13 kg	47525 0.13 kg	47526 0.13 kg	47527 0.13 kg

Flowmeter with float, DFM 185

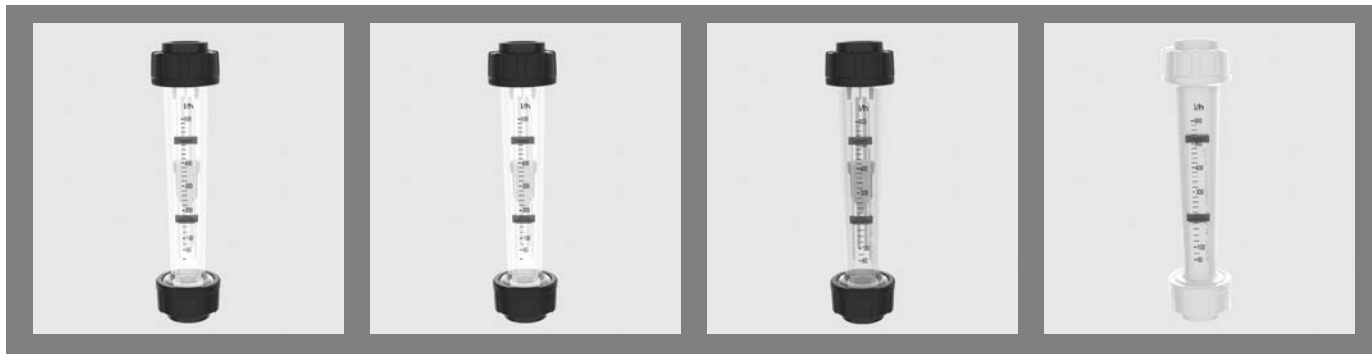


body PA		float magnet				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47707 0.13 kg	47708 0.13 kg	47709 0.13 kg	47710 0.13 kg

body PSU						
<i>size</i> <i>pressure range</i>	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
		measuring range(l/h)		15-150	40-400	60-600
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47540 0.13 kg	47541 0.13 kg	47542 0.13 kg	47543 0.13 kg

body PSU		float magnet				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47723 0.13 kg	47724 0.13 kg	47725 0.13 kg	47726 0.13 kg

Flowmeter with float, DFM 185

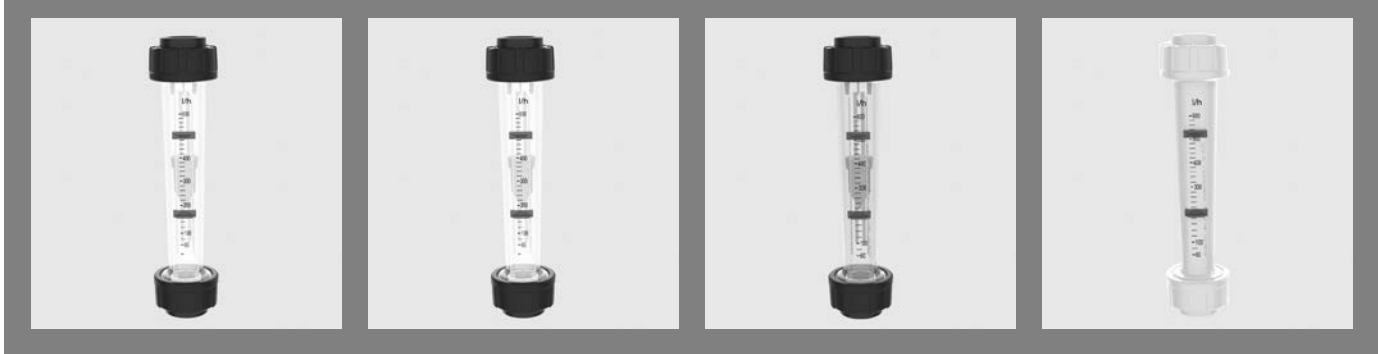

body PVDF


<i>size</i> <i>pressure range</i>	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVDF socket end DIN ISO	FPM		141976	141977	141978	141979
	<i>weight</i>		0.18 kg	0.18 kg	0.18 kg	0.18 kg

body PVDF

float magnet

<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		25	25	25	25
	DN(mm)		20	20	20	20
	DN(inch)		3/4	3/4	3/4	3/4
	G(inch)		1 1/4	1 1/4	1 1/4	1 1/4
	measuring range(l/h)		15-150	40-400	60-600	100-1,000
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVDF socket end DIN ISO	FPM		141980	141981	141982	141983
	<i>weight</i>		0.18 kg	0.18 kg	0.18 kg	0.18 kg

Flowmeter with float, DFM 185

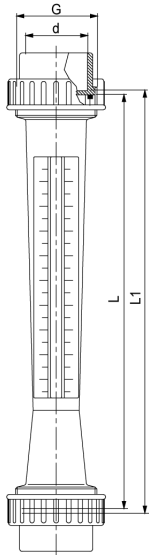

dimensions

d(mm)	25
DN(mm)	20
DN(inch)	3/4
PN(bar)	10
dimensions(mm)	
d	25
G	1 1/4
L	185
L1	191