


## Flowmeter with float, DFM 200

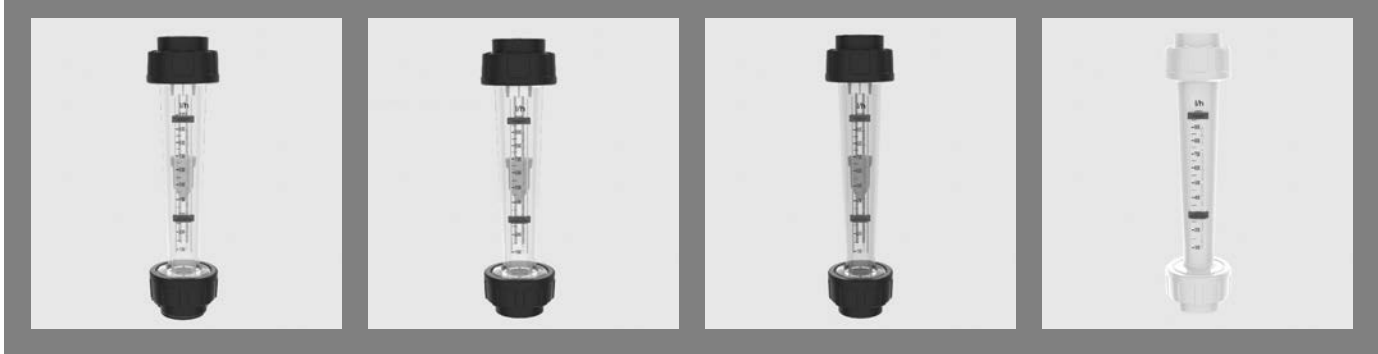

### Measuring Range


- 25 - 1,500 l/h

body PVC-U						
size pressure range	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
	measuring range(l/h)		25-250	40-400	100-1,000	150-1,500
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47512 0.25 kg	47513 0.25 kg	47514 0.25 kg	47515 0.25 kg

body PVC-U float magnet						
size pressure range	float		magnet	magnet	magnet	magnet
	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47695 0.25 kg	47696 0.25 kg	47697 0.25 kg	47698 0.25 kg

body PA						
size pressure range	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
	measuring range(l/h)		25-250	40-400	100-1,000	150-1,500
Connection	sealing	ident No.				
	PVC-U socket end DIN ISO	EPDM	47528 0.25 kg	47529 0.25 kg	47530 0.25 kg	47531 0.25 kg

## Flowmeter with float, DFM 200

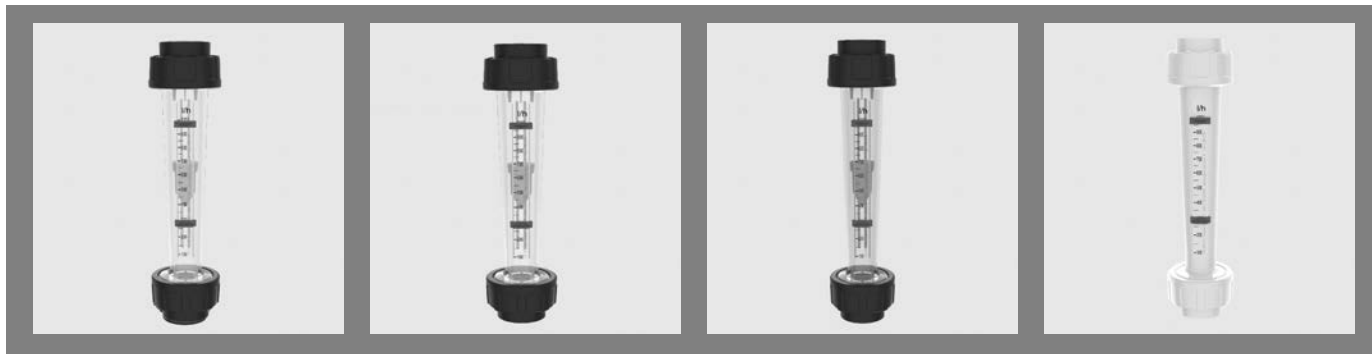


body PA		float magnet				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
	measuring range(l/h)		25-250	40-400	100-1,000	150-1,500
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47711 0.25 kg	47712 0.25 kg	47713 0.25 kg	47714 0.25 kg

body PSU		float magnet				
<i>size</i> <i>pressure range</i>	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
		measuring range(l/h)		25-250	40-400	100-1,000
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47544 0.25 kg	47545 0.25 kg	47546 0.25 kg	47547 0.25 kg

body PSU		float magnet				
<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
	measuring range(l/h)		25-250	40-400	100-1,000	150-1,500
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
PVC-U socket end DIN ISO	EPDM		47727 0.25 kg	47728 0.25 kg	47729 0.25 kg	47730 0.25 kg

## Flowmeter with float, DFM 200

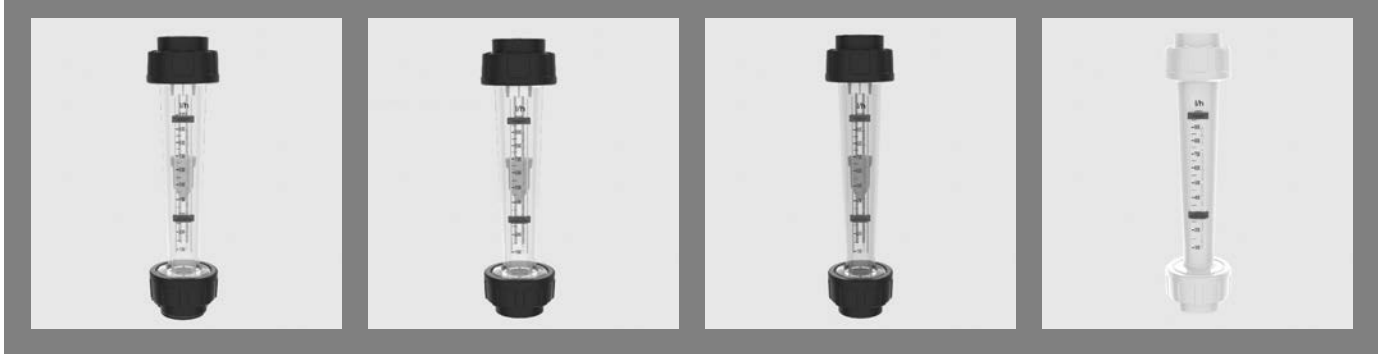

### body PVDF


<i>size</i> <i>pressure range</i>	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
	measuring range(l/h)		25-250	40-400	100-1,000	150-1,500
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
	<i>weight</i>					
PVDF socket end DIN ISO	FPM		141984	141985	141986	141987
	<i>weight</i>		0.35 kg	0.35 kg	0.35 kg	0.35 kg

### body PVDF

#### float magnet

<i>size</i> <i>pressure range</i>	float		magnet	magnet	magnet	magnet
	d(mm)		32	32	32	32
	DN(mm)		25	25	25	25
	DN(inch)		1	1	1	1
	G(inch)		1 1/2	1 1/2	1 1/2	1 1/2
measuring range(l/h)		25-250	40-400	100-1,000	150-1,500	
<i>Connection</i>	<i>sealing</i>	<i>ident No.</i>				
	<i>weight</i>					
PVDF socket end DIN ISO	FPM		141988	141989	141990	141991
	<i>weight</i>		0.35 kg	0.35 kg	0.35 kg	0.35 kg

## Flowmeter with float, DFM 200

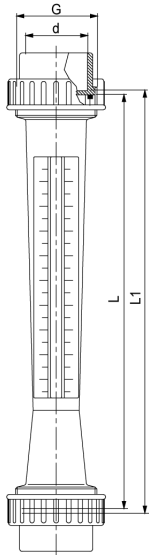

### dimensions

d(mm)	32
DN(mm)	25
DN(inch)	1
PN(bar)	10
dimensions(mm)	
d	32
G	1 1/2
L	200
L1	206